


CBHD1 24/5 - DIPSWITCH SETTINGS

BTI PART # 120.24050305

Dipswitches are located behind the metal or plastic panel and are accessible simply removing the round black cap (see the picture below).



Under the black cap you will find 2 sets of dipswitches (SW1 and SW2).

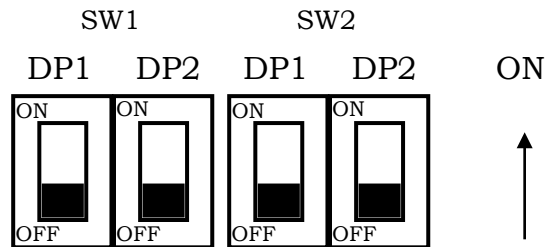

Dipswitch SW1 and SW2 affect the charging curve, current and voltage settings according to the tables below.

DIPSWITCH: **SW1**

DIP1	DIP2	CHARGING CURVE
ON	ON	IUIa-AGM (14) (default)
ON	OFF	IUIa-Acd for Lead-acid (Wet) batteries (1)
OFF	ON	IUUo-GEL for Gel and AGM batteries of different brands (6)
OFF	OFF	IUUo-AGM for AGM batteries (5)

DIPSWITCH: **SW2**

DIP1	DIP2	CURRENT and VOLTAGE
ON	ON	2.5A – 12V
ON	OFF	2.5A – 24V
OFF	ON	5A – 12V
OFF	OFF	5A – 24V (default)

CBHD1-N 24/10 - DIPSWITCH SETTINGS

BTI PART # 150.24100314.02

Dipswitches are located behind the metal or plastic panel and are accessible simply removing the round black cap (see the picture below).



Under the black cap you will find 2 sets of dipswitches (SW1 and SW2).



Dipswitch SW1 and SW2 affect the charging curve, current and voltage settings according to the tables below.

DIPSWITCH: **SW1**

DIP1	DIP2	CHARGING CURVE
ON	ON	IUIa-AGM (14) (default)
ON	OFF	IUIa-Acd for Lead-acid (Wet) batteries (1)
OFF	ON	IUUo-GEL for Gel and AGM batteries of different brands (6)
OFF	OFF	IUIa-Gel for Exide-Sonnenschein Gel batteries (11)

DIPSWITCH: **SW2**

DIP1	DIP2	CURRENT and VOLTAGE
ON	ON	8A – 12V
ON	OFF	8A – 24V
OFF	ON	10A – 12V
OFF	OFF	10A – 24V (default)

Fw:SAAAF10SMT