


**EXCEL- CBHD1-XR-P 24/13 - DIPSWITCH SETTINGS****BTI PART # 162.24130301**

Dipswitches are located behind the front panel accessible via a large round rubber cap. You will find 2 sets of dipswitches (SW1 and SW2).

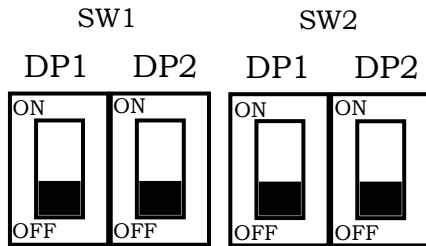

The 2 dipswitches in SW1 adjust the charging curve as shown in the table below.

**DIPSWITCH: SW1**

<b>DP1</b>	<b>DP2</b>	<b>CHARGING CURVE</b>	<b>Curve Validation on Start-Up</b>
ON	OFF	IUIa-ACD (#1) <b>(default)</b>	Red led blinks twice
OFF	OFF	IUUo-agm (#5)	Green led blinks twice
OFF	ON	IUUo-gel (#6)	Red and Yellow leds blink twice
ON	ON	IUIUo-agm (#14)	Red and Green leds blink twice

The 2 dipswitches in SW2 adjusts the current according to the table below.

**DIPSWITCH: SW2**

<b>DP1</b>	<b>DP2</b>	<b>CURRENT</b>
ON	ON	8A
ON	OFF	10A
OFF	OFF	13A

Once you have finished configuring the charger with the desired charging curve and current replace the label and put an indicator of the new setting on the label.

For chargers manufactured after May 25, 2020.  
Serial numbers 2439??? and higher.

May 25, 2020

FW: 006-008-002